
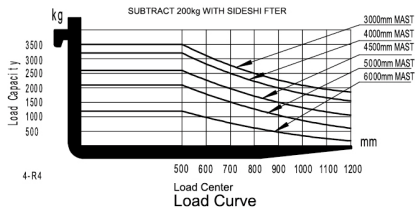


### Forklift 2.0T Main Specifications

General	Manufacturer		JEVEDA			
	1	2	FD20T	FL20T	FGL20T	
	3	Model	Diesel	Gasoline	LPG	
	4	Rated Load Capacity	2000	2000	2000	
	5	Load Centre	500	500	500	
	6	Rated Lift Height	3000	3000	3000	
	7	Free Lift Height	140	140	140	
	8	Fork Size (LxWxT)	1070 x 120x40	1070 x 125x 40	1070 x 125 x 40	
	9	Mast Tilt Angle (F/R,a°/β°)	6°/12°	6°/12°	6°/12°	
Characteristic & Dimension	10	Fork Overhang (Wheel Center to Fork Face)	X1(mm)	460	460	
	11	Rear Overhang	x2(mm)	520	520	
	12	Ground Clearance (Bottom of Mast)	H7(mm)	110	110	
	13	Length to Face of Fork (Without Fork)	L1(mm)	2630	2630	
	14	Overall Width	B1(mm)	1170	1170	
	15	Mast Lowered Height	H1(mm)	2055	2055	
	16	Mast Extended Height (With Backrest)	H4(mm)	4070	4070	
	17	Overhead Guard Height	H5(mm)	2215	2215	
	18	Turning Radius (Outside)	Wa(mm)	2365	2365	
	19	Min. Aisle width for pallets	Ast(mm)	4120	4120	
Performance	20	Travel Speed (No Load)	km/h	21	21	
	21	Lifting Speed (Full Load)	mm/sec	490	490	
	22	Lowering Speed (Full Load)	mm/sec			
	23	Max. Drawbar Pull (Full Load/No Load)	KN	17/14.5	No Load ≥300 Full Load ≤600	17/14.5
Chassis	24	Max. Gradeability (Full Load)	%	20	20	
	25	Tyre (Front x 2)	mm	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR
	26	Tyre (Rear x 2)	mm	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR
	27	Front Tread	B2(mm)	970	970	970
Weight	28	Rear Tread	B3(mm)	980	980	
	29	Wheelbase	Y(mm)	1650	1650	
	30	Total Weight	kg	3620	3620	
	31	Front Axle Weight Distribution (Full Load)	kg	5058	5058	
Power & Transmission	32	Rear Axle Weight Distribution (Full Load)	kg	562	562	
	33	Front Axle Weight Distribution (No Load)	kg	1450	1450	
	34	Rear Axle Weight Distribution (No Load)	kg	2170	2170	
	35	Battery	V/Ah	12/90	12/60	12/60
	36	Fuel Tank Capacity	L	50	50	
	37	Transmission Type	HYDRAULIC	HYDRAULIC	HYDRAULIC	
	38	Transmission Stage (FWD/RVS)	1/1	1/1	1/1	
	39	Operating Pressure (For Attachments)	Mpa	18.5	18.5	

### 2.0 TON MAST SPECIFICATIONS & RATED CAPACITIES

Mast Type	Mast Name	Max. Fork Height (mm)	Load Capacity (kg)		Overall Height (mm)			Free Lift (mm)		Tilt Angle (Single)	Tilt Angle (Double)
					Lowered	Extended		Without Backrest	With Backrest		
			2.0t	2.0t (Double)		Without Backrest	With Backrest				
Wide View Mast	M300	3000	2000	2000	2055	3580	4070	140	140	6-12	
	M330	3300	2000	2000	2205	3880	4370	140	140	6-12	
	M400	4000	2000	2000	2605	4580	5070	140	140	6-6	*6-12
	M450	4500	1800	*1900	2855	5080	5570	140	140	6-6	*6-12
	M470	4700	1450	*1850	2955	5280	5770	140	140	6-6	*6-12
	M500	5000	1300	*1700	3155	5580	6070	140	140	6-6	*6-6
	M550	5500	1100	*1500	3405	6080	6570	140	140	3-6	*3-6
2-Stage Full Free Wide View Mast	M600	6000	950	*1300	3655	6580	7070	140	140	3-6	*3-6
	FM300	3000	2000	2000	2070	3605	4068	1470	1007	6-12	
	FM370	3700	2000	2000	2420	4255	4718	1800	1357	6-6	
3-Stage Full Free Wide View Mast	FM400	4000	2000	2000	2670	4605	5068	2000	1607	6-6	*6-12
	TFM450	4500	1700	*1800	2145	5155	5570	1540	1140	6-6	*6-6
	TFM480	4800	1500	*1650	2245	5355	5770	1640	1240	6-6	*6-6
	TFM500	5000	1400	*1600	2295	5655	6070	1740	1290	6-6	*6-6
	TFM550	5500	1100	*1500	2495	6155	6570	1840	1490	3-6	*3-6
	TFM600	6000	800	*1400	2685	6755	7170	2040	1690	3-6	*3-6

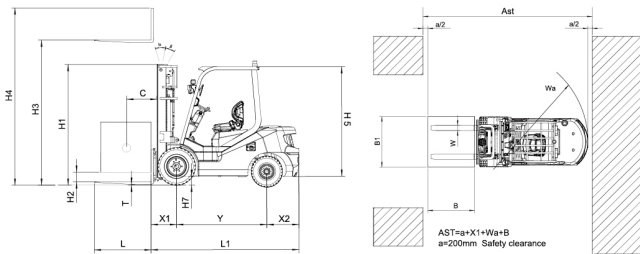

## FORKLIFT 2.5T MAIN SPECIFICATIONS

		JEVEDA				
General	1	Manufacturer	FD25T	FL25T	FGL25T	
	2	Model	Diesel	Gasoline	LPG	
	3	Power Type				
	4	Rated Load Capacity	Q(kg)	2500	2500	2500
Characteristic & Dimension	5	Load Centre	C(mm)	500	500	500
	6	Rated Lift Height	H3(mm)	3000	3000	3000
	7	Free Lift Height	H2(mm)	140	140	140
	8	Fork Size (LxWxT)	mm	1070 x 120x40	1070 x 125 x 40	1070 x 125 x 40
	9	Mast Tilt Angle(F/R,a°/β°)	deg	6°/12°	17/14.5°	6°/12°
	10	Fork Overhang (Wheel Center to Fork Face)	X1(mm)	460	460	460
	11	Rear Overhang	x2(mm)	520	520	520
	12	Ground Clearance(Bottom of Mast)	H7(mm)	110	110	110
	13	Length to Face of Fork (Without Fork)	L1(mm)	2630	2630	2630
	14	Overall Width	B1(mm)	1170	1170	1170
	15	Mast Lowered Height	H1(mm)	2055	2055	2055
	16	Mast Extended Height (With Backrest)	H4(mm)	4070	4070	4070
17	Overhead Guard Height	H5(mm)	2215	2215	2215	
18	Turning Radius (Outside)	Wa(mm)	2365	2365	2365	
19	Min.Aisle width for pallets	mm	4120	4120	4120	
20	Travel Speed (No Load)	km/h	19	21	21	
21	Lifting Speed (Full Load)	mm/sec	510	490	490	
22	Lowering Speed (Full Load)	mm/sec		No Load ≥300 Full Load ≤600		
23	Max.Drawbar Pull (Full Load/No Load)	KN	17/14.5	17/14.5	17/14.5	
24	Max.Gradeability (Full Load)	%	20	20	20	
25	Tyre (Front x 2)	mm	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	
26	Tyre (Rear x 2)	mm	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	
27	Front Tread	B2(mm)	970	970	970	
28	Rear Tread	B3(mm)	980	980	980	
29	Wheelbase	Y(mm)	1650	1650	1650	
30	Total Weight	kg	3860	3860	3860	
Weight	31	Front Axle Weight Distribution(Full Load)	kg	5724	5724	5724
	32	Rear Axle Weight Distribution(Full Load)	kg	636	636	636
	33	Front Axle Weight Distribution(No Load)	kg	1545	1545	1545
	34	Rear Axle Weight Distribution(No Load)	kg	2315	2315	2315
Power & Transmission	35	Battery	VIAh	12/60	12/60	12/60
	36	Fuel Tank Capacity	L	50	50	50
	37	Transmission Type		HYDRAULIC	HYDRAULIC	HYDRAULIC
	38	Transmission Stage(FWD/RVS)		1/1	1/1	1/1
	39	Operating Pressure(For Attachments)	Mpa	18.5	18.5	18.5

## 2.5 TON MAST SPECIFICATIONS & RATED CAPACITIES

Mast Type	Mast Name	Max. Fork Height (mm)	Load Capacity (kg)		Overall Height (mm)			Free Lift (mm)		Tilt Angle (Single)	Tilt Angle (Double)
					Lowered	Extended		Without Backrest	With Backrest		
						Without Backrest	With Backrest				
Wide View Mast	M300	3000	2500	2500	2055	3580	4070	140	140	6-12	6-12
	M330	3300	2500	2500	2205	3880	4370	140	140	6-6	6-12
	M400	4000	2450	2450	2605	4580	5070	140	140	6-6	*6-12
	M450	4500	2000	*2400	2855	5080	5570	140	140	6-6	*6-12
	M470	4700	1750	*2100	2955	5280	5770	140	140	6-6	*6-12
	M500	5000	1600	*2050	3155	5580	6070	140	140	6-6	*6-6
	M550	5500	1350	*1700	3405	6080	6570	140	140	3-6	*3-6
2-Stage Full Free Wide View Mast	FM300	3000	2500	2500	2070	3605	4068	1470	1007	6-12	6-6
	FM370	3700	2500	2500	2420	4255	4718	1800	1357	6-6	6-6
	FM400	4000	2500	2500	2670	4605	5068	2000	1607	6-6	*6-12
3-Stage Full Free Wide View Mast	TFM450	4500	2000	*2300	2145	5155	5570	1540	1140	6-6	*6-6
	TFM480	4800	1800	*2100	2245	5355	5770	1640	1240	6-6	*6-6
	TFM500	5000	1500	*2000	2295	5655	6070	1740	1290	6-6	*6-6
	TFM550	5500	1200	*1800	2495	6155	6570	1840	1490	3-6	*3-6
	TFM600	6000	850	*1600	2685	6755	7170	2040	1690	3-6	*3-6