



## Forklift 5.0T Main Specifications

		JEVEDA	
		FD50T	
General	1	Manufacturer	JEVEDA
	2	Model	FD50T
	3	Power Type	Diesel
	4	Rated Load Capacity	5000
Characteristic & Dimension	5	Load Centre	600
	6	Rated Lift Height	3000
	7	Free Lift Height	212
	8	Fork Size (LxWxT)	1220x150*60
	9	Mast Tilt Angle(F/R,α°/β°)	6°/12°
	10	Fork Overhang (Wheel Center to Fork Face)	587
	11	Rear Overhang	640
	12	Ground Clearance(Bottom of Mast)	200
	13	Length to Face of Fork (Without Fork)	3477
	14	Overall Width	1995
Performance	15	Mast Lowered Height	2515
	16	Mast Extended Height (With Backrest)	4437
	17	Overhead Guard Height	2450
	18	Turning Radius (Outside)	3280
	19	Min.Aisle width for pallets	5285
	20	Travel Speed (No Load)	20
	21	Lifting Speed (Full Load)	400/500
	22	Lowering Speed (Full Load)	≥300, ≤600
Chassis	23	Max.Drawbar Pull (Full Load/No Load)	54
	24	Max.Gradeability (Full Load)	32/35
	25	Tyre (Front x 4)	8.25-15-14PR
	26	Tyre (Rear x 2)	8.25-15-14PR
Weight	27	Front Tread	1470
	28	Rear Tread	1700
	29	Wheelbase	2250
	30	Total Weight	8260
Power & Transmission	31	Front Axle Weight Distribution(Full Load)	11860
	32	Rear Axle Weight Distribution (Full Load)	1400
	33	Front Axle Weight Distribution(No Load)	4250
	34	Rear Axle Weight Distribution(No Load)	4010
	35	Battery	24/90
	36	Fuel Tank Capacity	120
37	Transmission Type	HYDRAULIC	
38	Transmission Stage(FWD/RVS)	2/1	
39	Operating Pressure(For Attachments)	19.5	

## 5.0 TON MAST SPECIFICATIONS & RATED CAPACITIES

MastType	MastName	Max. Fork Height (mm)	LoadCapacity (kg)	Overall Height (mm)			Free Lift (mm)		Tilt Angle
				Extended			Without Backrest	With Backrest	
				Lowered	Without Backrest	With Backrest			
2-Stage Wide View Mast	M300	3000	5000	2515	3955	4425	200	200	6-12
	M310	3100	5000	2565	4055	4525	200	200	6-12
	M330	3300	5000	2665	4255	4725	200	200	6-12
	M350	3500	5000	2765	4455	4925	200	200	6-12
	M375	3750	5000	2890	4705	5175	200	200	6-12
	M400	4000	5000	3065	4955	5425	200	200	6-12
	M450	4500	5000	3315	5455	5925	200	200	6-12
	M475	4750	5000	3440	5705	6175	200	200	6-6
	M500	5000	5000	3565	5955	6425	200	200	6-6
	M550	5500	4750	3865	6455	6925	200	200	3-6
	M600	6000	4400	4115	6955	7425	200	200	3-6
	3-Stage FullFree WideView Mast	TFM360	3600	5000	2375	4715	5027	1252	945
TFM400		4000	5000	2510	5117	5429	1387	1080	6-6
TFM435		4350	4500	2625	5463	5775	1502	1195	6-6
TFM450		4500	4500	2675	5613	5925	1552	1245	6-6
TFM480		4800	4500	2775	5913	6225	1652	1345	6-6
TFM500		5000	4500	2840	6107	6419	1717	1410	3-6
TFM550		5500	4200	3005	6603	6915	1882	1575	3-6
TFM600		6000	4000	3220	7103	7415	2097	1790	3-6
TFM650	6500	3350	3385	7597	7909	2262	1955	3-3	
TFM700	7000	2900	3550	8093	8405	2427	2120	3-3	

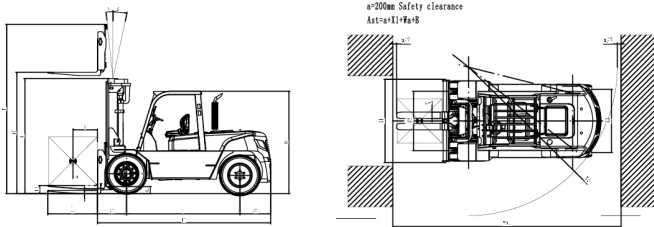

## Forklift 7.0T Main Specifications

		JEVEDA	
		FD70T	
General	1	Manufacturer	JEVEDA
	2	Model	FD70T
	3	Power Type	Diesel
	4	Rated Load Capacity	7000
	5	Load Centre	600
Characteristic & Dimension	6	Rated Lift Height	H3(mm)
	7	Free Lift Height	H2(mm)
	8	Fork Size (LxWxT)	mm
	9	Mast Tilt Angle(F/R.a°/B°)	deg
	10	Fork Overhang (Wheel Center to Fork Face)	X1(mm)
	11	Rear Overhang	x2(mm)
	12	Ground Clearance(Bottom of Mast)	H7(mm)
	13	Length to Face of Fork (Without Fork)	L1(mm)
	14	Overall Width	B1(mm)
	15	Mast Lowered Height	H1(mm)
	16	Mast Extended Height (With Backrest)	H4(mm)
	17	Overhead Guard Height	H5(mm)
	18	Turning Radius (Outside)	Wa(mm)
	19	Min.Aisle width for pallets	Ast(mm)
Performance	20	Travel Speed (No Load)	km/h
	21	Lifting Speed (Full Load)	mm/sec
	22	Lowering Speed (Full Load)	mm/sec
	23	Max.Drawbar Pull (Full Load/No Load)	KN
	24	Max.Gradeability (Full Load)	%
Chassis	25	Tyre (Front x 4)	mm
	26	Tyre (Rear x 2)	mm
	27	Front Tread	B2(mm)
	28	Rear Tread	B3(mm)
	29	Wheelbase	Y(mm)
Weight	30	Total Weight	kg
	31	Front Axle Weight Distribution(Full Load)	kg
	32	Rear Axle Weight Distribution (Full Load)	kg
	33	Front Axle Weight Distribution(No Load)	kg
	34	Rear Axle Weight Distribution(No Load)	kg
Power & Transmission	35	Battery	V/Ah
	36	Fuel Tank Capacity	L
	37	Transmission Type	HYDRAULIC
	38	Transmission Stage(FWD/RVS)	2/1
	39	Operating Pressure(For Attachments)	Mpa

## 7.0 TON MAST SPECIFICATIONS & RATED CAPACITIES

MastType	MastName	Max. Fork Height (mm)	LoadCapacity (kg)	Lowered	Overall Height (mm)		Free Lift (mm)		Tilt Angle	
					Extended		Without Backrest	With Backrest		
					Without Backrest	With Backrest				
2-Stage Wide View Mast			FD70T		7.0t		7.0t			
	M300	3000	7000	2615	3970	4440	215	215	6-12	
	M310	3100	7000	2665	4070	4540	215	215	6-12	
	M330	3300	7000	2765	4270	4740	215	215	6-12	
	M350	3500	7000	2865	4470	4940	215	215	6-12	
	M375	3750	7000	2990	4720	5190	215	215	6-12	
	M400	4000	7000	3165	4970	5440	215	215	6-12	
	M450	4500	7000	3415	5470	5940	215	215	6-12	
	M475	4750	7000	3540	5720	6190	215	215	6-6	
	M500	5000	7000	3665	5970	6440	215	215	6-6	
	M550	5500	6600	3965	6470	6940	215	215	3-6	
	M600	6000	6400	4215	6970	7440	215	215	3-6	
	3-Stage Full Free Wide View Mast	TFM360	3600	7000	2475	4730	5042	1311	1045	6-6
		TFM400	4000	7000	2610	5132	5444	1443	1180	6-6
TFM435		4350	6500	2725	5478	5790	1559	1295	6-6	
TFM450		4500	6000	2775	5628	5940	1609	1345	6-6	
TFM480		4800	6000	2875	5928	6240	1709	1445	6-6	
TFM500		5000	6000	2940	6122	6434	1773	1510	3-6	
TFM550		5500	5700	3105	6618	6930	1939	1675	3-6	
TFM600		6000	5400	3320	7118	7430	2109	1890	3-6	
TFM650		6500	4750	3485	7612	7924	2273	2055	3-3	
TFM700		7000	3700	3650	8108	8420	2439	2220	3-3	

## ZHEJIANG JEVEDA MACHINERY CO., LTD

ADDRESS: NO.1,ROAD ONE,XINDENG NEW DISTRICT,FUYANG,HANGZHOU,ZHEJIANG 311404,CHINA

TEL:+86-571-8688 8355 (AMERICA) +86-571-8886 9363 (EUROPE) +86-571-8688 8377 (ASIA, AFRICA, OCEANIA)

E-MAIL: info@Jeveda.com